
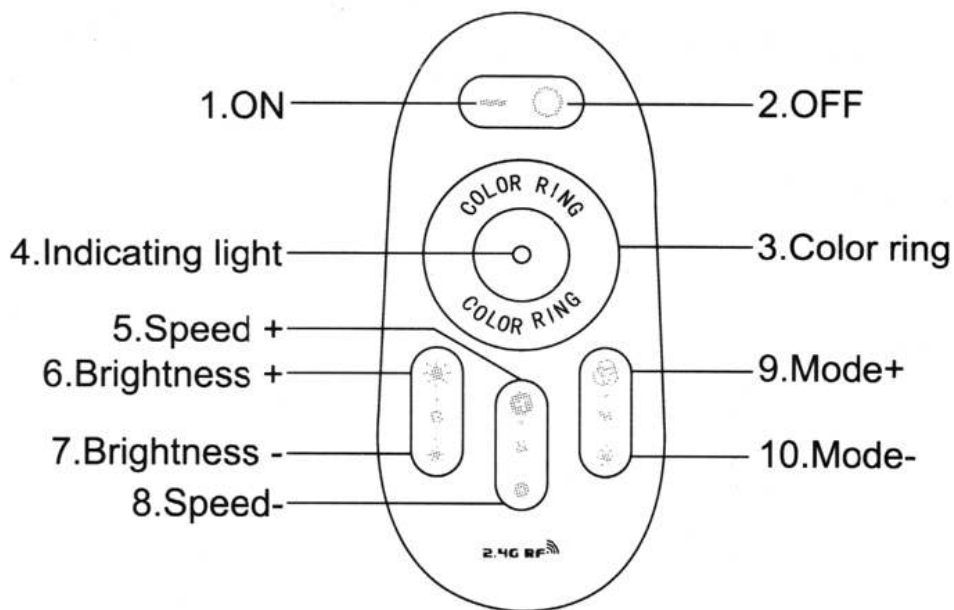


Wi-Fi Controller and Wi-Fi Hub User Guide

I. Set up both Wi-Fi Controller and Wi-Fi Hub

Wi-Fi Controller

- Connect to DC12V-24V and the RGB strip based on the instruction.

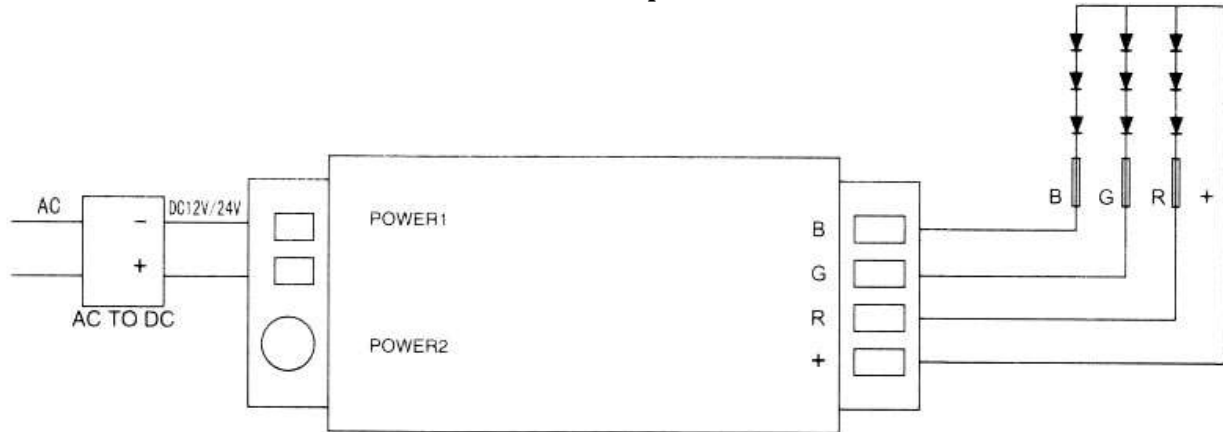

- Synchronization with the remote:

1. Switch off the power of controller.
2. Switch on again and press the key 5 once the light is on (within 3 seconds).
3. The LED light will blink twice when it is done.

- Code clearing:

1. Switch off the power of controller.
2. Switch on again and long press key 5 once the light is on (within 3 seconds).
3. The LED light will blink nine times swiftly when it is done.


Wi-Fi Hub

- Supply DC5V to the hub. You can simply connect to a USB socket.
- The power indicator will flash once the setup is completed.
- Revert to default setting:
Press & hold the “RST” key for around 5 seconds until the two indicators flash.


- II. Download the “Mi-Light” app in the App Store (iPhone) or Play Store (Android)



- III. Switch on your Wi-Fi Hub and open your Wi-Fi setting
- Choose and connect to “milight”.
 - The “Link” indicator on the controller will light up when the connection is made.

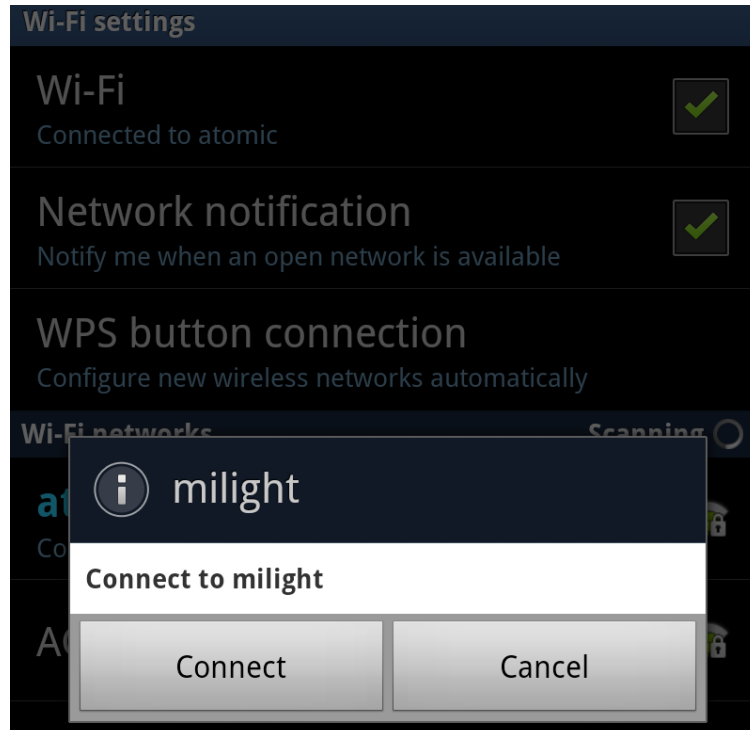


- IV. Open the “Mi-Light” App
- A new device is already detected and the right-hand-side logo represent the device is connected.
 - You can rename the milight device to any name.

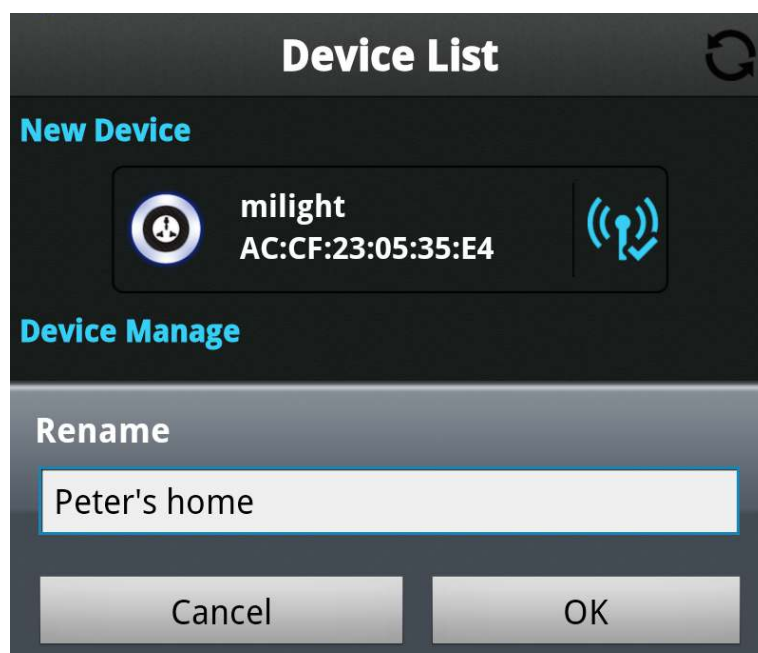

V. Choose the bottom left interface and start to control LED light



- How to connect the WiFi hub to your home network?
AP Configuration:
Search the network -> choose your home network.

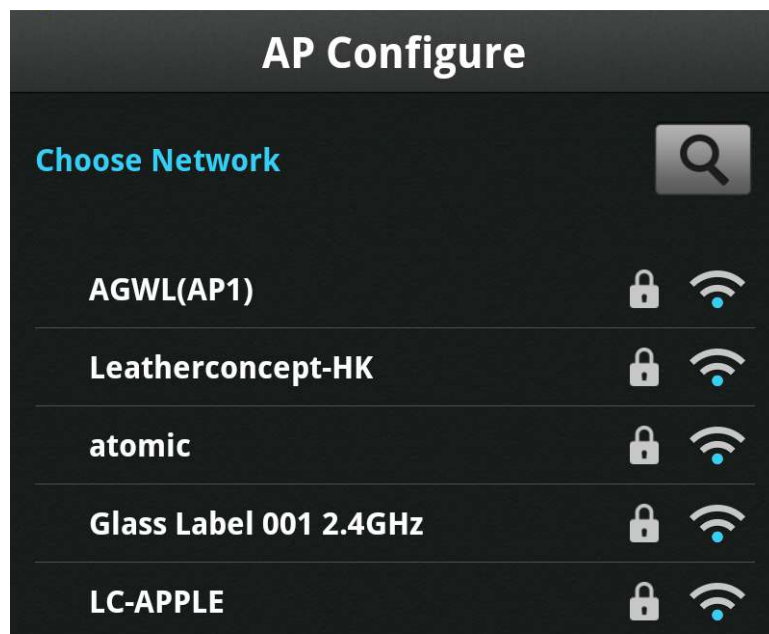

- Both "Link" and "SYS" indicator are also light up again after the connection is completed.
- Go back to device list and press refresh to update after a while.
- Connect your smartphone back to your home network to control the LEDs.